

100% Money Back
Guarantee


Vendor:HP

Exam Code:HP2-Z30

Exam Name:Fast Track - Applying HP FlexNetwork
Fundamentals

Version:Demo

QUESTION 1

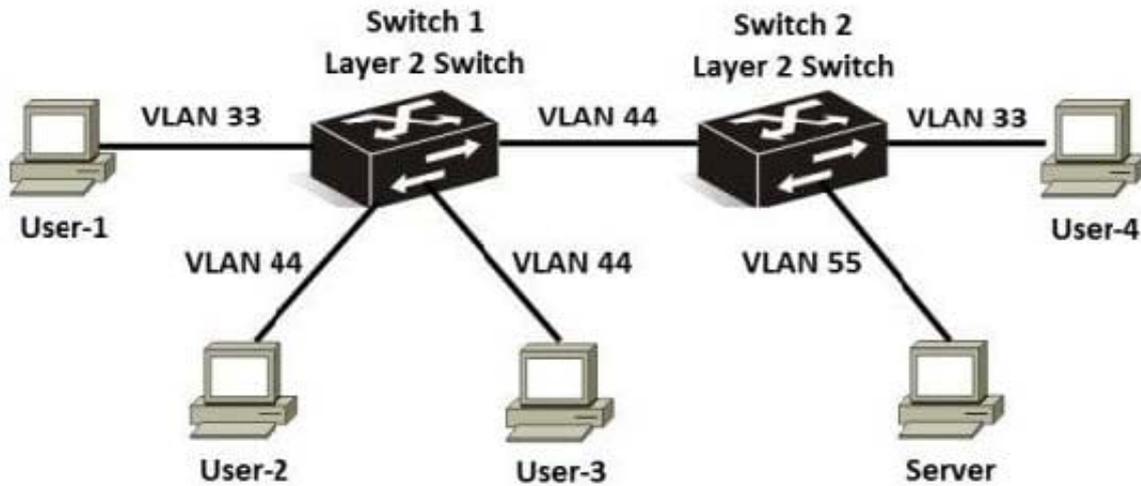

Switch 1 and Switch 2 are HP ProVision switches operating as Layer 2 switches. VLAN 33 has been defined as the management VLAN on both switches. Based on this topology, which user devices can access Switch 1 by using SSH?

- A. only User-1, User-2, and the Server
- B. only User-1
- C. all users and servers in the topology
- D. only User-1 and User-2

Correct Answer: B

QUESTION 2

Which statement is true about spanning tree and HP Comware and HP Provision switches?

- A. A Provision switch requires the active region-configuration command to activate changes.
- B. A Provision switch uses non-standard port costs in spanning tree calculations.
- C. A Comware switch automatically auto-senses edge ports.
- D. A Comware switch uses non-standard port costs in spanning tree calculations.

Correct Answer: D

QUESTION 3

Which statement is true about using the RADIUS protocol for AAA functions\?

- A. Only passwords are encrypted in the RADIUS payload.
- B. Digital certificates are used to authenticate the networking devices and AAA server.
- C. AAA accounting records can be saved using RADIUS or syslog.
- D. RADIUS uses TCP as a transport.

Correct Answer: A

QUESTION 4

Which HP ProVision and HP Comware commands restore a configuration file from a TFTP server to the switches' flash? (Select two.)?

- A. copy tftp://10.1.1.1/config.cfg flash:
- B. restore tftp://10.1.1.1/startup-configuration config.cfg
- C. restore startup-configuration from 10.1.1.1 config.cfg
- D. copy tftp config config.cfg 10.1.1.1 config.cfg pc

Correct Answer: CD

QUESTION 5

Which trends of today's data center networks is the HP FlexNetwork Architecture designed to meet?

- A. virtualization
- B. Intelligent Resilient Framework
- C. network analytics
- D. server decentralization

Correct Answer: A

QUESTION 6

What is the default state of spanning tree on HP Comware switches?

- A. MSTP is enabled.
- B. RSTP is enabled.
- C. STP is disabled.
- D. PVST is enabled.

Correct Answer: C

QUESTION 7

Which IRF configuration, in the correct order, includes the physical interfaces in an IRF port?

- A interface <interface-id>
shutdown
quit
irf-port-configuration active
irf <member-id/port-number>
port group interface <interface-id>
quit
interface <interface-id>
undo shutdown
quit
- B interface <interface-id>
shutdown
quit
irf <member-id/port-number>
port group interface <interface-id>
quit
interface <interface-id>
undo shutdown
quit
- C irf <member-id/port-number>
port group interface <interface-id>
quit
- D irf <member-id/port-number>
port group interface <interface-id>
quit
interface <interface-id>
shutdown
quit
interface <interface-id>
undo shutdown
quit

A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: B

http://h20565.www2.hp.com/portal/site/hpsc/template.BINARYPORTLET/public/kb/docDisplay/resource.process/?spf_p.tpst=kbDocDisplay_ws_Blandspf_p.rid_kbDocDisplay=docDisplayResURLandjavax.portlet.begCacheTok=com.vignette.cachetokenandspf_p.rst_kbDocDisplay =wsrp-

QUESTION 8

After setting up DHCP relay, the network administrator has the DHCP client try to acquire addressing information, but the process fails. What should the network administrator do to solve this problem?

- A. Configure DHCP relay on SwitchB.
- B. Enable DHCP Snooping on SwichA.
- C. Execute the dhcp enable command on SwitchA.
- D. Execute the routing command SwichA.

Correct Answer: C

QUESTION 9

Which Access Point (AP) type corresponds to HP MSM autonomous operational mode?

- A. Thin
- B. Fat
- C. Modal
- D. Fit

Correct Answer: B

QUESTION 10

A network administrator is using Intelligent Management Center (IMC). Which protocol must the network administrator configure to correctly identify HP devices when performing auto discovery?

- A. telnet
- B. LLDP
- C. SSH
- D. SNMP

Correct Answer: D

QUESTION 11

Which statement is correct about IRF?

- A. Identical models of switches must be used in the same IRF domain.
- B. Logical IRF port one on a switch must be connected to IRF port two on a second switch.
- C. MSTP is used to remove loops within an IRF domain.
- D. LACP is used to build IRF port connections between switches.

Correct Answer: B

QUESTION 12

What is a key emerging standard protocol that HP Virtual Application Networks (VAN) use to implement Software-Defined Networks (SDN)?

- A. IMC
- B. OpenFlow
- C. FlexFabric
- D. OpenStack

Correct Answer: B