

100% Money Back
Guarantee

Vendor:Huawei

Exam Code:H12-811

Exam Name:HCIA-Datacom V1.0

Version:Demo

QUESTION 1

The router needs to modify the destination IP address in the data packet when forwarding the data packet. ()

- A. True
- B. False

Correct Answer: B

QUESTION 2


Which of the following IPv6 addresses is a multicast address? ()

- A. FE80:2EO:FCFF:FEEF:FEC
- B. FC00:2EO:FCFF:FEEF:FEC
- C. FF02::2EO:FCFF:FEEF:FEC
- D. 2000::2EO:FCFF:FEEF:FEC

Correct Answer: C

QUESTION 3

When a company's network management needs to plan the network, the data packets that allow PC1 to access PC2 go through the G0/0/0 port (G0/0/2 on the picture). The data packet that PC2 accesses to PC1 goes from port G0/0/4 (G0/0/0 in the picture). () (Single-choice question)

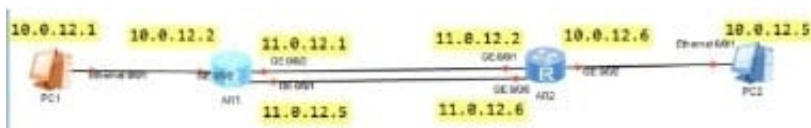

- A. 10.0.12.5255.255.255.25511.0.12.6 #10.0.12.1255.255.255.25511.0.12.1
- B. 10.0.12.5255.255.255.25511.0.12.210.0.12.1255.255.255.25511.0.12.5
- C. 0.0.0.00.0.0.00 #11.0.12.6 #11.0.12.1
- D. 0.0.0.0 #0.0.0.0 #11.0.12.2 #11.0.12.5

Correct Answer: B

QUESTION 4

The priority of OSPF routing protocol is ()

- A. 10
- B. 60
- C. 100

Correct Answer: B

QUESTION 5


About the above configuration command is correct ()

- A. Modify the user's authority level to 3. And save the configuration
- B. Modify the limit level of the save command used by a user to 3
- C. Modify the permission level of the user view command to 3, and save the matching sinus
- D. Modify the permission level of the save command in the user view to 3

Correct Answer: D

QUESTION 6

The switch G0/0/1 port configuration information is shown in the figure. Which VLAN data frame does the switch forward without VLANTAG? ? () (Single-choice question)

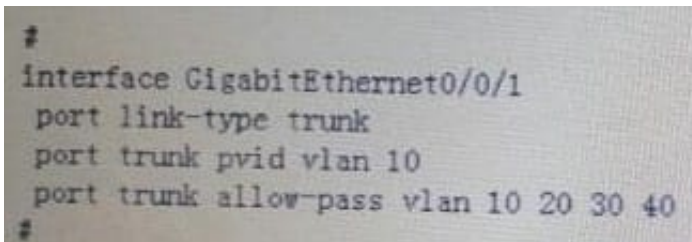

```
#
interface GigabitEthernet0/0/1
port link-type trunk
port trunk pvid vlan 10
port trunk allow-pass vlan 10 20 30 40
#
```

- A. 30
- B. 20
- C. 40

Correct Answer: A

QUESTION 7

The network management system can only view the operating status of the device through the SNMP protocol, but cannot issue configurations. ()

- A. True
- B. False

Correct Answer: B

QUESTION 8

Which of the following features does the default VLAN in the Layer 2 Ethernet switch have? ()*

- A. The default VLAN cannot be deleted manually
- B. By default, all ports of the switch are member ports of the default VLAN
- C. A default VLAN must be created before it can be assigned a port
- D. The IP address configured on the switch will only be applied to the member ports of the default VLAN

Correct Answer: AB

QUESTION 9

An ACL rule is as follows: Which of the following IP addresses can be matched by permit rules? () rule5 permit ip source 10.0.2.0 0.255.255

- A. 10.0.6.7
- B. 10.0.4.5
- C. 10.0.5.6
- D. 10.0.2.1

Correct Answer: C

QUESTION 10

The Layer 2 networking of WLAN refers to STA. It uses AC as its own gateway. ()

- A. True
- B. False

Correct Answer: A

QUESTION 11


Wireless access controller (AC, Access Controller) As a unified management and control device in the FIT AP architecture, the following description of the role of AC is wrong ()

- A. No matter when the data is forwarded, the user's data message will be forwarded by AC.
- B. User access control
- C. User access authentication
- D. AP configuration delivery

Correct Answer: A

QUESTION 12

The network is shown in the figure below. The following statements are correct? () (Multiple Choice Questions)

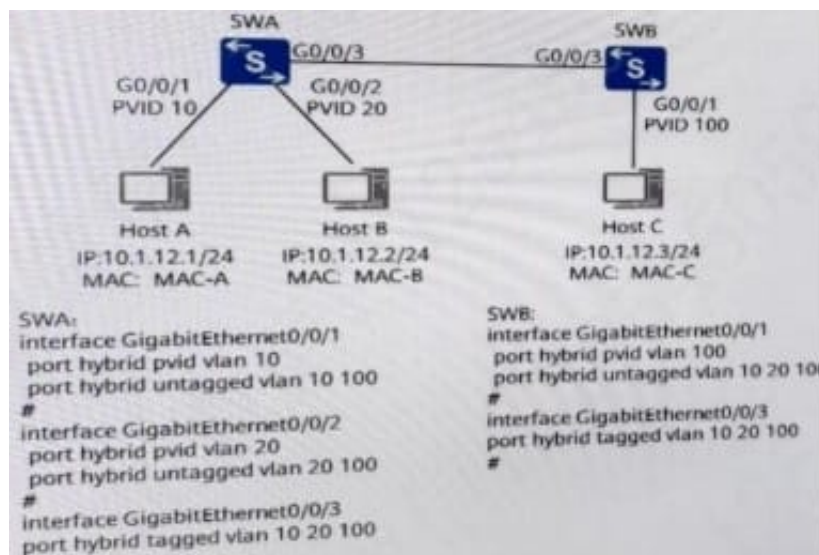

- A. Host A and Host C can ping through
- B. All hosts can ping each other
- C. Host B and Host C can ping through
- D. Host A and Host B cannot ping through

Correct Answer: ACD