Exam : HP0-921

Title: Supporting the Enterprise

Modular Library (EML)

Version: DEMO

1.A customer wants to purchase a second EML 245e library. What must be ordered in addition to the EML 103e base module?

A.redundant power supply

B.EML Command View License

C.EML Secure Manager License

D.EML capacity expansion module

Correct:B

2.A customer needs a library with a minimum of 120 TB capacity and an expected compression ratio of 1:2. Which libraries most economically meet the customer's needs? (Select two.)

A.EML 103e with LTO3 tape drives

B.EML 245e with LTO2 tape drives

C.EML 245e with LTO3 tape drives

D.EML 442e with LTO2 tape drives

E.EML 442e with LTO3 tape drives

Correct:C D

3.A customer needs a throughput of 5 TB/hr with an expected data compression ratio of 2:1. Which library best meets the customer's requirements?

A.EML 103e with LTO3 tape devices

B.EML 245e with LTO 2 tape devices

C.EML 245e with LTO 3 tape devices

D.EML 442e with LTO 3 tape devices

Correct:D

4. When completing the installation process in an EML E-Series tape library, how can you verify that the Fibre Channel links are functioning correctly?

A.Power cycle the tape library and check the OCP messages.

B.Execute the fcping diagnostic utility from the management station.

C.Issue the diaggetput command from the Command Line Interface.

D.Disconnect and reconnect the cables and check the link indicators.

Correct:D

5.Click the Exhibit button. A customer wants to use an EML E-Series library with partitioning in a Linux environment. Which backup software is suitable for this solution?

Advanced Library Features						
DAS, DAF, and SAN Support	HP Data Protector	CA BrightStor ARCserve	EMC Legato NetWorker	IBM Tivoli Storage Manager	Symantec Backup Exec	Symantec NetBackup
Enterprise Libraries	IMPORTANT: See the <u>Backup Application Details</u> page for the latest supported versions of backup software.					
ESL E-Series 2 Unit Cross Link 1		_3	2			4
ESL E-Series 3-5 Unit Cross Link 1	~					~
ESL 9000 Multi-Unit Scalability 1	~	,3	×	~		*
ESL Mixed Media	¥	₂ 3	~	· ·	,A	*
ESL Partitioning		,3	¥		√ ⁴	
EML Partitioning	~		2	- 2	J4.	7

A.Symantec NetBackup

B.Symantec Backup Exec

C.CA Brightstor ARCserve

D.Syncsort Backup Express

Correct:A

6. What are the main considerations when choosing a location for an EML E-Series tape library?

(Select three.)

A.floor space

B.room height

C.power requirements

D.lighting requirements

E.grounding requirements

F.distance to disk storage

Correct: A C E

7. What do you check to verify the interface controller configuration in an EML E-Series tape library? (Select three.)

A.host access

B.LAN connection

C.power redundancy

D.robot arm movement

E.Fibre Channel speed setting

F.Fibre Channel connection type

Correct: A E F

8. What is a consideration when using a UPS with an EML E-Series library?

A.The UPS power must last long enough to finish active backup jobs.

B.The load of the UPS should not exceed eighty percent of the UPS marked electrical current rating.

C.The UPS must be connected to the Interface Manager serial connector to allow the UPS to shut down the EML if a power failure occurs.

D.The UPS must be connected to the Interface Controller serial connector to allow the UPS to stop the tape drives if a power failure occurs.

Correct:B

9. What are the minimum requirements to use the Command View TL graphical user interface (GUI)?

A.interface controller and Command View TL


B.management station and Command View TL

C.interface controller, Command View TL, and GUI client with a supported Web browser

D.management station, Command View TL, and GUI client with a supported Web browser

Correct:D

10.Click the Exhibit button. A customer wants to use an EML103e tape library with Data Protector 5.1. The library firmware is 1070, the Interface Manager has firmware i180 and the e2400-FC 4G has firmware 5.7.1f loaded. The Command View TL version is 1.70. Using the Exhibits as a reference, what must be changed before the library can be used?

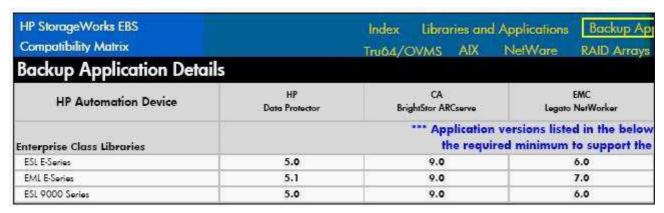

A.No changes are needed.

B.Data Protector must be upgraded to version 6.

C.Command View TL needs an upgrade to version 1.80.

D.Interface Manager needs firmware i171 and the Interface Controller needs 5.7.1b.

Correct:C

Trying our product!

- ★ 100% Guaranteed Success
- ★ 100% Money Back Guarantee
- ★ 365 Days Free Update
- ★ Instant Download After Purchase
- ★ 24x7 Customer Support
- ★ Average 99.9% Success Rate
- ★ More than 69,000 Satisfied Customers Worldwide
- ★ Multi-Platform capabilities Windows, Mac, Android, iPhone, iPod, iPad, Kindle

Need Help

Please provide as much detail as possible so we can best assist you.

To update a previously submitted ticket:





Guarantee & Policy | Privacy & Policy | Terms & Conditions

Any charges made through this site will appear as Global Simulators Limited.

All trademarks are the property of their respective owners.

Copyright © 2004-2014, All Rights Reserved.