**Exam** : **S10-300** 

Title : Snia Storage


Architect-Assessment, Plann

ing&Design

Version: Demo

1. You have been tasked with identifying upgrade options for your networked storage. Which two should you do? (Choose two.) A. Only select hardware and software that is SMI-S compliant. B. Share all received information openly with all vendors involved. C. Understand needs and requirements as well capabilities of your existing technology. D. Enlist legal advice or support of your purchasing department when creating RFI, RFP, and RFQs. Answer: CD 2. What are three key advantages of deploying a director-based solution over a mesh of switches? (Choose three.) A. lower cost B. consistent latency C. improved availability D. increased hop count E. ease of management Answer: BCE 3. What is the goal of a SAN designed with no single point of failure? A. to provide redundant paths to data B. to have a good data backup system C. to minimize unexpected loss of data access D. to have clustered servers so that one is always available Answer: C 4. Your SAN currently has eight server ports and eight disk ports on one 16 port switch. Each server port requires 80 MB/s of one-way bandwidth, spread out evenly among the storage devices. The customer would like to add 28 server ports along with 28 disk ports. Each server will evenly distribute its traffic on each disk. Using 16 port 1 Gb switches, which topology should you select to minimize the number of switches and ISLs required? A. star

B. full mesh

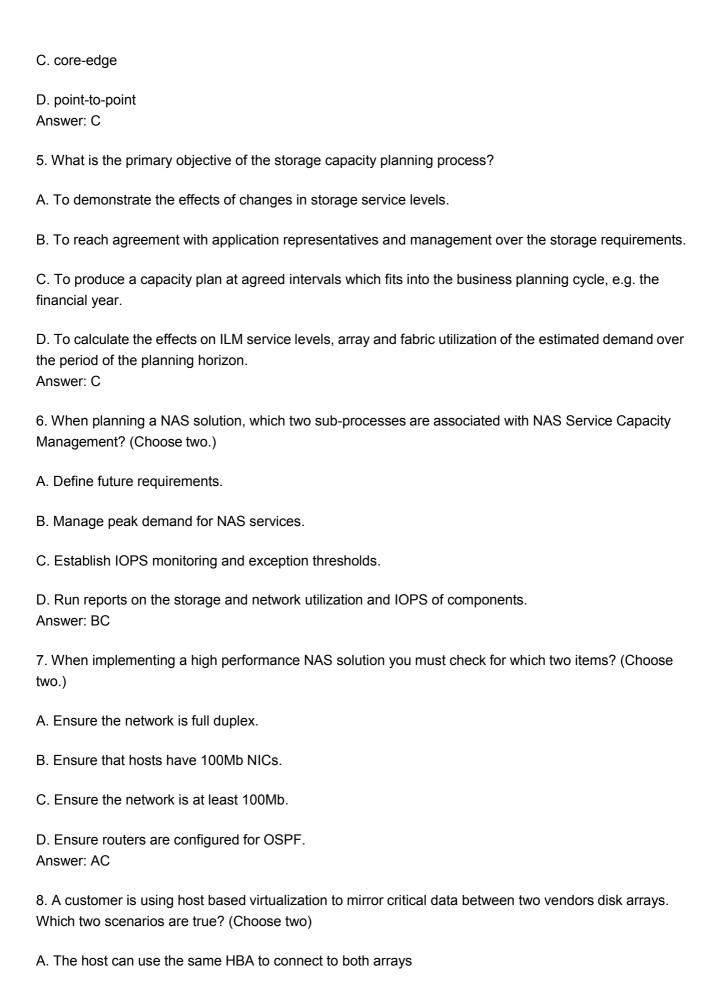

- B. The customer can adhere to either vendors SAN design rules
- C. The customer must adhere to both vendors SAN design rules
- D. The host must use different HBAs with different firmware to connect to each array Answer: CD
- 9. A customer has a disk subsystem with eight ports. Each port delivers 200 MB/s. The customer wants a solution designed which allows access from 32 servers with no single point of failure. Which number of HBAs and the associated throughput, provide server access to the disk subsystem?
- A. 16 HBAs, 75 MB/s
- B. 32 HBAs, 90 MB/s
- C. 64 HBAs, 25 MB/s
- D. 64 HBAs, 50 MB/s

Answer: C

- 10. A customer has a terabyte database and is required to back up the data daily. The SLA has allotted 6 hours for completion of the backup from 7:00 P.M. until 1:00 A.M. However, the customer has a tape library with only five SDLT tape devices running at native speeds of 40 GB/hour. Which two should you do to successfully meet the expected SLA requirements? (Choose two.)
- A. interleave data streams
- B. enable server-based compression
- C. use multiple data streams across multiple devices
- D. prioritize the schedule to launch during periods of greatest inactivity Answer: AC

## **Trying our product!**

- ★ 100% Guaranteed Success
- ★ 100% Money Back Guarantee
- ★ 365 Days Free Update
- ★ Instant Download After Purchase
- ★ 24x7 Customer Support
- ★ Average 99.9% Success Rate
- ★ More than 69,000 Satisfied Customers Worldwide
- ★ Multi-Platform capabilities Windows, Mac, Android, iPhone, iPod, iPad, Kindle

## **Need Help**

Please provide as much detail as possible so we can best assist you.

To update a previously submitted ticket:





## Guarantee & Policy | Privacy & Policy | Terms & Conditions

Any charges made through this site will appear as Global Simulators Limited.

All trademarks are the property of their respective owners.

Copyright © 2004-2014, All Rights Reserved.