

**100%** Money Back  
**Guarantee**

**Vendor:**Sybase

**Exam Code:**510-308

**Exam Name:**Sybase powerbuilder professional 9.0

**Version:**Demo

**QUESTION 1**

JSP must compile:

- A. Never, its a page server.
- B. Every time a page is requested.
- C. Every time a new session is started.
- D. Whenever the JSP date is newer then the compiled date.

Correct Answer: D

---

**QUESTION 2**

Which properties of a PB component can be set when deployed from the project painter? (Choose 3)

- A. Component type
- B. Instance pooling
- C. Minimum pooled instances
- D. Maximum pooled instances
- E. Transaction support
- F. Transaction outcome

Correct Answer: ABE

---

**QUESTION 3**

After inserting or modifying rows in a grouped DataWindow, what functions should be called to ensure proper display?

- A. SetSort() then Sort()
- B. Sort() then GroupCalc()
- C. FindCategory() then RowsMove()
- D. GetChanges() then Move()
- E. Reset() then Move()

Correct Answer: B

---

**QUESTION 4**

A Custom Visual User Object \_\_\_\_\_.

- A. consists of one control with associated events and functions.
- B. inherits its definition from a standard control.
- C. does not inherit its definition from a standard control.
- D. inherits its definition from multiple standard and/or custom controls.

Correct Answer: C

---

#### QUESTION 5

n\_business is a custom class user object. n\_business autoinstantiate property is set to false. Which snippets of code successfully instantiate an instance of the user object? (Choose 2)

- A. n\_business Inv\_business
- B. n\_business Inv\_business Inv\_business = create nonvisualobject
- C. n\_business Inv\_business Inv\_business = create n\_business
- D. n\_business Inv\_business Inv\_business = create (n\_business)
- E. n\_business Inv\_business Inv\_business = create using n\_business

Correct Answer: CE

---

#### QUESTION 6

In the code shown below, what is the value of lb\_valid\_object?

```
powerobject lpo_null_object
```

```
boolean lb_valid_object
```

```
SetNull(lpo_null_object)
```

```
lb_valid_object = isValid(lpo_null_object)
```

- A. True
- B. False
- C. Null
- D. Causes a runtime error

Correct Answer: C

---

### QUESTION 7

Which of the following ways can be used to assign an XML template to a DataWindow? (Choose 2)

- A. On the HTML Generation Tab of the properties pane in the DataWindow Painter, use the drop down to set the value of the UseTemplate property
- B. In PowerScript, use `dw_address.Object.DataWindow.Export.XML.UseTemplate = t_address`
- C. In PowerScript, use `dw_address.Object.DataWindow.Data.XMLDTD = t_address`
- D. In PowerScript, use `dw_address.Object.DataWindow.Export.XML.Template[1].Name = t_address`
- E. On the Data Export Tab of the properties pane in the DataWindow Painter, use the drop down to set the value of the UseTemplate property

Correct Answer: BE

---

### QUESTION 8

Calling the DataWindow controls AcceptText() method (Choose 3)

- A. from a GetFocus event may cause an infinite loop.
- B. may trigger an ItemChanged event.
- C. from a LoseFocus event may cause an infinite loop.
- D. may trigger an ItemError event.

Correct Answer: BCD

---

### QUESTION 9

Which statements are TRUE about the Retrieve function? (Choose 2)

- A. Retrieves rows from the database into a DataWindow or DataStore.
- B. Can be executed with or without arguments depending on the query.
- C. Returns 1 if the call is successful or 1 if an error occurs.
- D. Triggers a RowFocusChanged event for each row retrieved.

Correct Answer: AB

---

### QUESTION 10

A Library List can be set for which of the following items?

- A. Window Painter

- B. Workspace
- C. PowerBuilder Library
- D. Target
- E. Project

Correct Answer: D

---

#### QUESTION 11

Properties and methods CANNOT be defined in which of the following objects?

- A. Custom Class User Object
- B. Standard Class User Object
- C. Structure
- D. Window

Correct Answer: C

---

#### QUESTION 12

Given a Custom Class User Object n\_counter - Having the instance variable:

```
private integer ii_counter
```

And a public function:

```
of_increment ( )
```

```
return ii_counter ++
```

What will be the value of ii\_counter at the end of this code segment? n\_counter ln\_counter

```
ln_counter = CREATE n_counter
```

```
ln_counter.ii_counter = 8
```

```
of_increment(ln_counter)
```

- A. 8
- B. This code will not compile
- C. 9
- D. 7

Correct Answer: B



To Read the [Whole Q&As](#), please purchase the [Complete Version](#) from [Our website](#).

## Try our product !

**100%** Guaranteed Success

**100%** Money Back Guarantee

**365** Days Free Update

**Instant Download** After Purchase

**24x7** Customer Support

Average **99.9%** Success Rate


More than **800,000** Satisfied Customers Worldwide

Multi-Platform capabilities - **Windows, Mac, Android, iPhone, iPod, iPad, Kindle**

## Need Help

Please provide as much detail as possible so we can best assist you.

To update a previously submitted ticket:

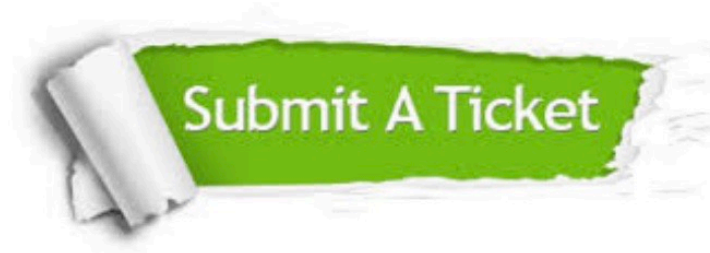

 <p><b>One Year Free Update</b> Free update is available within One Year after your purchase. After One Year, you will get 50% discounts for updating. And we are proud to boast a 24/7 efficient Customer Support system via Email.</p>	 <p><b>Money Back Guarantee</b> To ensure that you are spending on quality products, we provide 100% money back guarantee for 30 days from the date of purchase.</p>	 <p><b>Security &amp; Privacy</b> We respect customer privacy. We use McAfee's security service to provide you with utmost security for your personal information &amp; peace of mind.</p>
---	---	--

Any charges made through this site will appear as Global Simulators Limited.

All trademarks are the property of their respective owners.